

M-Lance Tag


FEATURES

- M-Lance Tag is very small in size & has very good read range, especially when attached to metal.
- The product has been designed to be easily attached by adhesive.
- Flexible Read/Write Range (reader dependant).

APPLICATIONS

- Used in IT asset tracking applications such as backup tapes, servers, hard drives and media tapes without any human intervention.
- Inventory control of small tools and manufacturing equipment, servers and network routers.

Chip Type:	Alien Higgs 3 EPC Class 1 Gen 2	
	EPC 96 bit extendable up to 480 bits	
	User Memory 512 bit	
	Data retention of 50 years	
	Write endurance 100.000 cycles	
Mechanical:	Dimension	23 x 9 x 5 mm
	Material	ABS
	Colour	Blue
	Weight	0.9 g
Electrical:	Operating Frequency	865-868MHz, (902-928MHz also available on request)
	Operating mode	Passive (battery-less transponder)
Ingress Protection:	IP54	
Thermal:	Storage Temp.	-20° C to +85° C
	Operating Temp.	-20° C to +85° C
Part Number:	377V1	
Options:	Available with:	
	Other IC type and Frequency on request	
	Other colour & material	
	Adhesive backing for easy mounting	
	Non-metallic application	




Tag Placement

- ✚ M-Lance tag is polarized along with the length of the tag.
- ✚ Place the tag in such a way that most of its bottom area comes in direct contact with metal.
- ✚ Ensure that there is no hindrance between the tag and the reader antenna.
- ✚ Reader antenna should be parallel to the length of tag as shown in below figure:

Correct way




Antenna

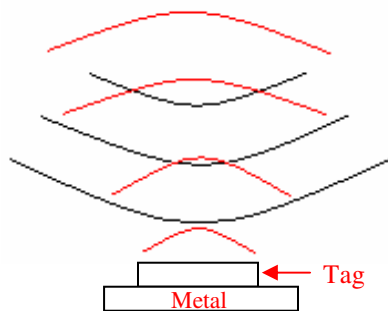

Wrong way



Antenna

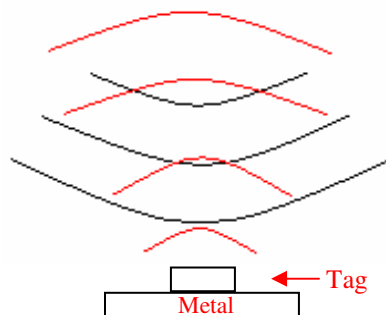


- ✚ Tag can be easily attached through adhesive tape at back.

M-Lance Tag Angular Sensitivity (Relative Read Range vs. Orientation)



Read range (in percent) at various angle.

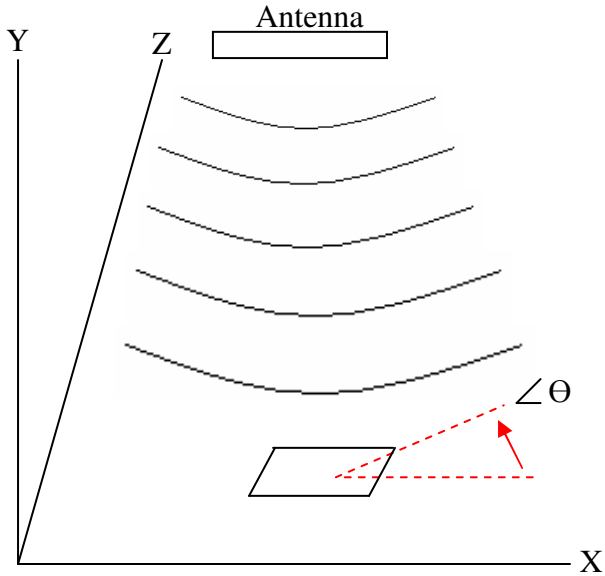

Tag is rotated in the X-Y plane about the z axis